

Sunburst 1000™ Series

AUTOMOTIVE TECHNICAL FELTS

F55B & Prism 7000



Sunburst 1000 Black S150360 (1.070 mm/.042")
 Sunburst 1000 Black S150360-020 (.640mm/.025")
 Sunburst 1000 Black S150360-031 (.790mm/.031")



Sunburst 1000 Black S150360-062 (1.570mm/.062")
 Sunburst 1000 Smoke S157660 (1.270mm/.050")
 Sunburst 1000 Black 115078B-54/72 (1.980mm/.078")




Sunburst 1000 Black 123125B-54 (3.180mm/.125")
 Sunburst 1000™ also available in white



Sunburst 1000 White S150160 (1.070mm/.042")
 Sunburst 1000 White S150160-020 (.640 mm/.025")

Solutions for BSR & NVH Applications

- Buzz
- Noise
- Squeak
- Vibration
- Rattle
- Harshness

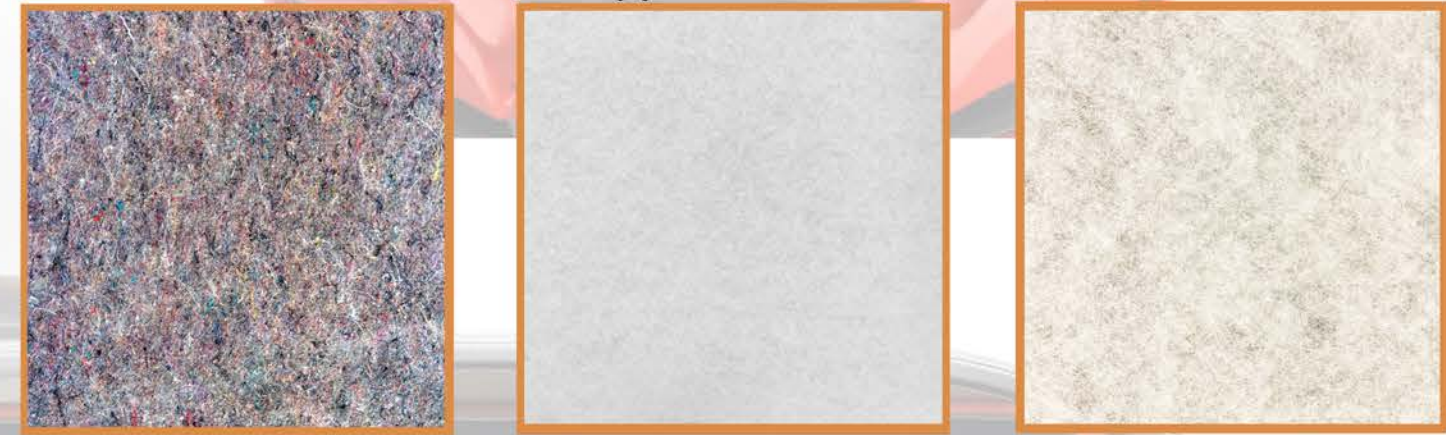

Shoddy Felt 1182505D-39 (18oz / .250")
 Underlayment Felt 5043080-79 (4.3oz / .080")
 Carbon Canister Felt HL025-WHT-39 (7mm /150gm)



Prism 7000 Black P750372 (1.270mm/.050")
 Prism 7000 Grey P757472 (1.270mm/.050")
 F-55 Black 55B0062 (1.570mm/.062")



F-55 Black 55B0078 (1.980mm/.078")
 F-55 Black 55B0093 (2.360mm/.093")
 F-55 Black 55B0125 (3.180mm/.125")

SAE U.S. Federal Specifications C-F-206G

Automotive Grade FMVSS302

- ### Felt Features & Applications
- Seating, headliners, gaskets, dust shields, door panels and other interior components
 - Cost saving alternative to Himelton and Flock
 - Meets most non-woven automotive specifications
 - Environmentally friendly
 - Non-woven fabric will not stretch, fray, or unravel
 - Resists stains, mold, and mildew
 - UV protected and color fast
 - High resistance to chemicals, salts, acids and alkalis

Superior Felt & Filtration Official Specifications								
SFF Item Number	Description	Fiber Makeup	Target Weight (oz)	Target Weight (gsm)	Target Thickness (in)	Target Thickness (mm)	Target Width (in)	Width (mm)
S150360	Sunburst 1000 0.042" *Various	100% Needled PET	6.500	220.000	0.042	1.070	60.000	1524
<small>*Sunburst 1000™ series available in a variety of colors</small>								
S150360-020	Sunburst 1000 0.020" Black	100% Needled PET	4.000	136.000	0.025	0.640	60.000	1524
S150360-031	Sunburst 1000 0.031" Black	100% Needled PET	5.000	170.000	0.031	0.790	60.000	1524
S150360-062	Sunburst 1000 0.062" Black	100% Needled PET	8.000	271.000	0.062	1.570	60.000	1524
S157660	Sunburst 1000 0.050" Smoke	100% Needled PET	7.000	237.000	0.050	1.270	60.000	1524
115078B-54/72	Sunburst 1000 0.078" Black	100% Needled PET	15.000	509.000	0.078	1.980	54.000	1372
123125B-54	Sunburst 1000 0.125" Black	100% Needled PET	23.000	780.000	0.125	3.180	54.000	1372
S150160	Sunburst 1000 0.042" White	100% Needled PET	6.500	220.000	0.042	1.070	60.000	1524
S150160-20	Sunburst 1000 0.025" White	100% Needled PET	4.000	136.000	0.025	0.640	60.000	1524
HN604B	Himelton 0.009" Black	VIS/PET	1.300	30.810	0.009	0.228	39.000	990
HN606B	Himelton 0.013" Black	VIS/PET	1.800	42.660	0.013	0.330	39.000	990
HN608B	Himelton 0.017" Black	VIS/PET	2.200	52.140	0.017	0.431	39.000	990
P750372	Prism 7000 0.050" Black	70%/30% Wool/RP	7.000	237.000	0.0500	1.270	72.000	1829
P757472	Prism 7000 0.050" Grey	70%/30% Wool/RP	7.000	237.000	0.0500	1.270	72.000	1829
55B0062	F-55 0.062" Black	75% Needled Wool	12.000	407.000	0.0620	1.570	72.000	1829
55B0078	F-55 0.078" Black	75% Needled Wool	15.000	509.000	0.0780	1.980	72.000	1829
55B0093	F-55 0.093" Black	75% Needled Wool	18.000	610.000	0.0930	2.360	72.000	1829
55B0125	F-55 0.125" Black	75% Needled Wool	24.000	814.000	0.1250	3.180	72.000	1829
55B0227	F-55 0.227" Black	75% Needled Wool	45.000	1526.000	0.2270	5.770	72.000	1829

- ### Superior Services
- Sewing
 - Slitting
 - Printing
 - Laminating
 - Die Cutting
 - Offline Needling
 - Custom Packaging



F-55 Black 55B0227 (5.770mm/.227")