


S.A.E. WOOL FELTS

Felt description corresponding to Specifications in General Use

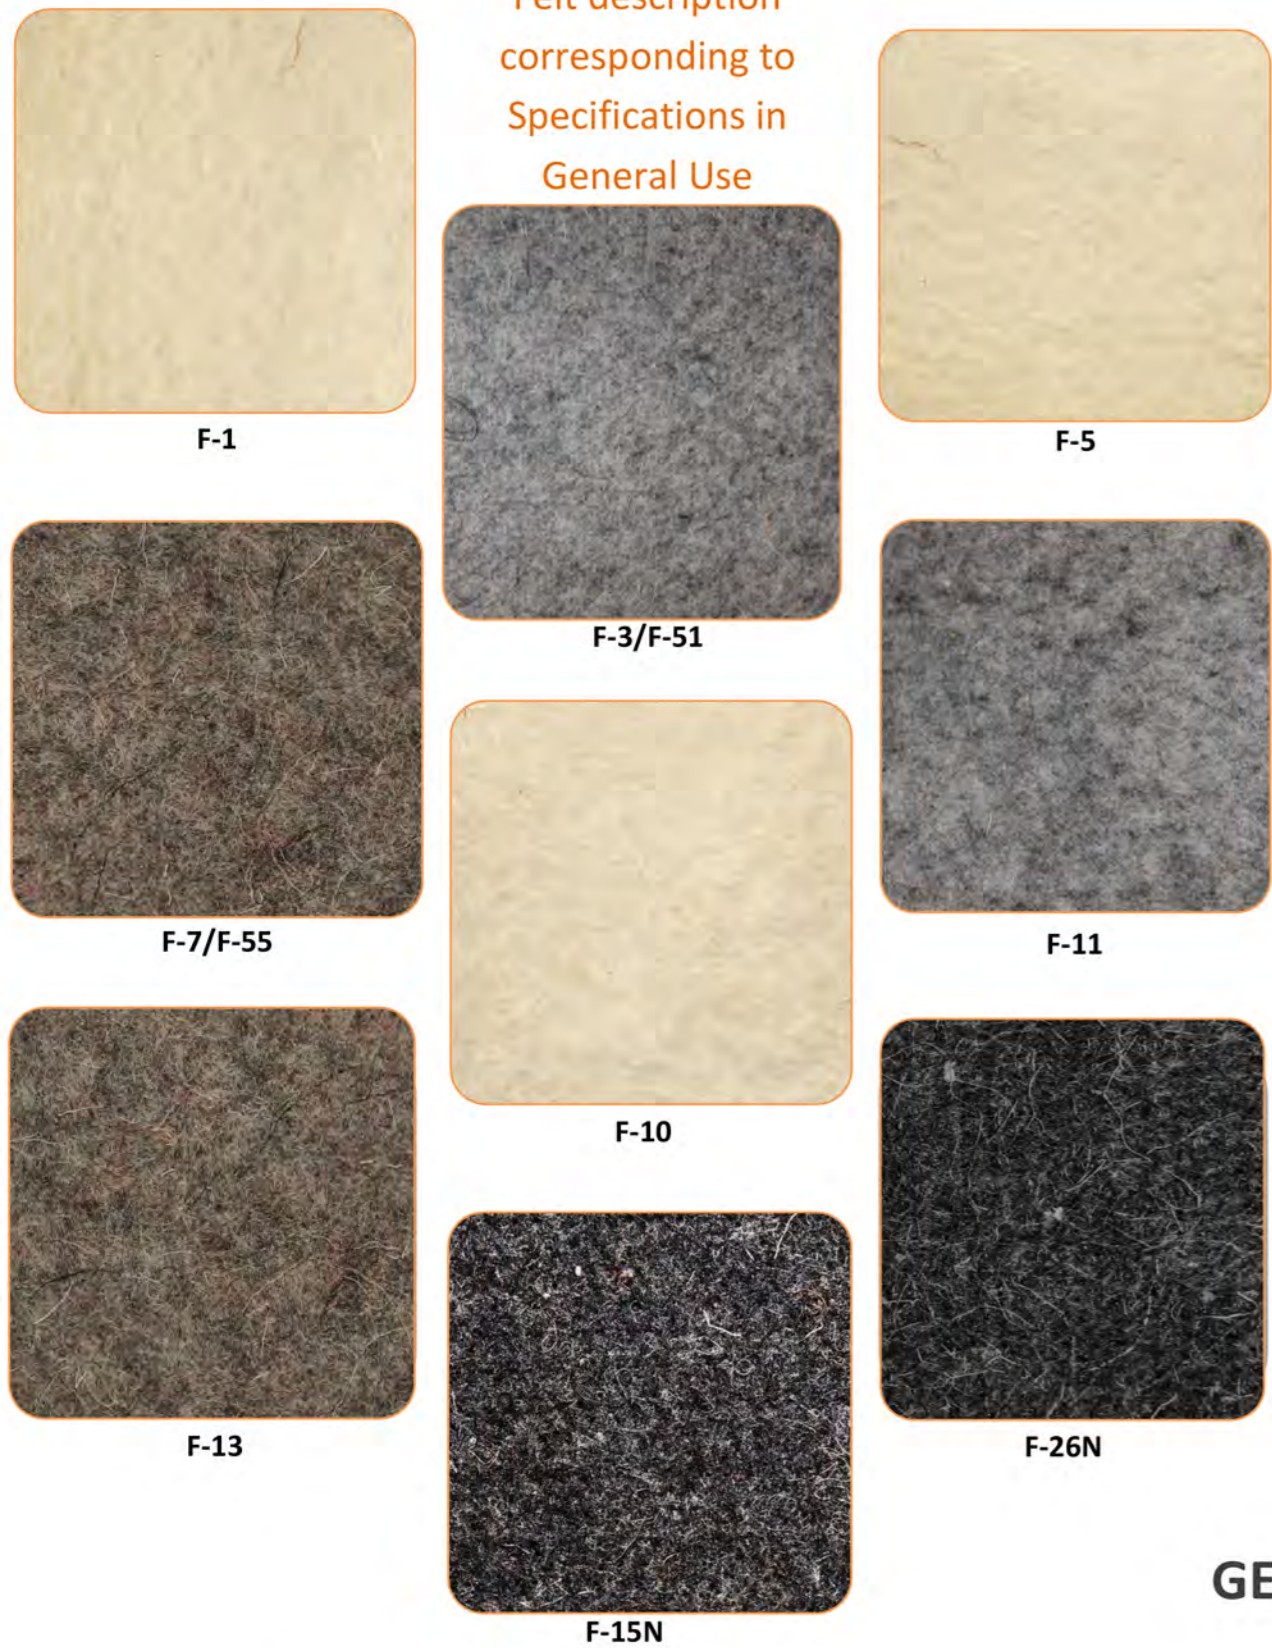

Industrial Felts

*Shades of industrial wool felt can change slightly due to the variability of natural and reprocessed fiber.



F-50 WOOL SHEET FELT 325 ORTHOPEDIC

SUPERIOR Felt & Filtration

Superior Felt & Filtration

1150 Ridgeview Drive
McHenry, IL 60050
Business: 815-759-1234
Toll Free: 1-800-255-3358



F-55B 325F ORTHOPEDIC

SYNTHETIC & BLENDED

Available in many variations of fiber, weights, widths & thickness.



POLYESTER-FIRM BLACK POLYESTER

POLYESTER/PSA SYNTHETIC WITH LOW MELT

POLYESTER-MEDIUM SYNTHETIC WITH LOW MELT

POLYPROPYLENE SUNBURST 1000 ANTI-SQUEAK

POLYESTER-SOFT

NOMEX

www.superiorfelt.com

GENERAL USE DESCRIPTION AND WEIGHT IN POUNDS PER SQUARE

Weight Per Square Yard For Standard Thickness

Superior Style No.	CF-206G Type 1	Color	Construction	Nominal Wool	Actual Wool (Min.)	Width	1/16"	3/32"	1/8"	3/16"	1/4"	5/16"	3/8"	1/2"	5/8"	3/4"	7/8"	1"
F-1	16R1	White	Pressed	100%	95.00%	60"	»	»	2.00	3.00	4.00	5.00	6.00	8.00	10.00	12.00	14.00	16.00
F-3	16R3	Grey	Pressed	95-100%	85.00%	60"	»	»	1.97	2.93	3.90	4.87	5.85	7.80	9.75	11.7	13.65	15.60
F-5	12R1	White	Pressed	100%	95.00%	60"	»	»	1.53	2.29	3.06	3.82	4.59	6.12	7.65	9.18	10.71	12.24
F-7	12R3	Grey	Pressed	85-95%	80.00%	72"	»	»	1.53	2.29	3.06	3.82	4.59	6.12	7.65	9.18	10.71	12.24
F-10	9R1	White	Pressed	100%	95.00%	72"	»	»	1.06	1.59	2.12	2.65	3.18	4.24	5.30	6.36	7.42	8.48
F-11	9R2	Grey	Pressed	95-100%	87.00%	72"	»	»	1.06	1.59	2.12	2.65	3.18	4.24	5.30	6.36	7.42	8.48
F-13	9R4	Grey	Pressed	80-85%	75.00%	72"	»	»	1.06	1.59	2.12	2.65	3.18	4.24	5.30	6.36	7.42	8.48
F-15N	9R5	Grey	Needled	60-65%	55.00%	72"	»	»	1.06	1.59	2.12	2.65	3.18	4.24	5.30	6.36	7.42	8.48
F-26N	8R5	Grey	Needled	50-55%	45.00%	72"	»	»	0.90	1.38	1.81	2.25	2.69	3.63	4.50	5.38	6.31	7.19
F-50	16R1X	White	Pressed	100%	95.00%	60"	0.98	1.425	«	«	«	«	«	«	«	«	«	«
F-51	16R3X	Grey	Lots Vary	100%	92.00%	72"	0.98	1.425	«	«	«	«	«	«	«	«	«	«
F-55	12R3X	Grey	Lots Vary	80-85%	75.00%	72"	0.75	1.125	«	«	«	«	«	«	«	«	«	«
F-55B	12R3X	Black	Needled	80-85%	75.00%	72"	0.75	1.125	«	«	«	«	«	«	«	«	«	«

SERVICES

- Slitting
- Die Cutting
- Offline Needling
- Custom Packaging
- Laminating
- Printing
- Sewing

FELT TREATMENTS

- Vermin Resistance
- Mildew & Moisture Resistance
- Moth Resistance